

## Содержание

<b>NMS-uQ7-BKLT v1 ds-en</b> .....	3
<b>Technical Specifications</b> .....	4
<b>Block Diagram</b> .....	5
<b>Power tree</b> .....	6
<b>Mechanical Specifications</b> .....	7
<b>Main Hardware Components</b> .....	8
Component Location .....	8
Top view .....	8
Bottom View .....	9
Processor .....	10
<b>External connectors</b> .....	11
I2C .....	11
<b>Debugging/development interfaces</b> .....	12
I2C .....	12
RESET .....	13
<b>External connectors</b> .....	14
Top view .....	14
Bottom view .....	15
<b>Appendix 1</b> .....	16



# NMS-uQ7-BKLT v1 ds-en

System on Module Q7\_BFK is based on the Baikal-T1 (BE-T1000) applications processor. BE-T1000 is a russian system on a chip based on the MIPS Warrior P-class P5600 architecture by the «Baikal Electronics»



## Technical Specifications

Таблица 1: Main technical specifications

<b>Form factor</b>	Qseven
<b>CPU</b>	Baikal-T1 (( <a href="#">BE-T1000</a> ))
	Cores: 2 x P5600 MIPS 32 r5 1,2 GHz
	L2 Cache: 1 MB
	Operating Frequency [Max]: 1.2 GHz
<b>RAM</b>	ECC DDR3 4 Gb, interface 40-bit, 5 x 512 M x 8 ( <a href="#">MT41K512M8DA-107</a> )
	NAND FLASH 4 Mb, SPI interface ( <a href="#">TC58CYG2S0HRAIG</a> ) NOR FLASH 128 Mb, SPI interface ( <a href="#">MT25QU128ABA1EW7</a> )
<b>EEPROM</b>	2 Kb, I2C interface, Unique ID 48-bit ( <a href="#">24AA025</a> )
<b>Power management IC</b>	RTC ( <a href="#">PCF8523TK</a> )
	Ethernet PHY ( <a href="#">KSZ9031</a> )
	DDR Termination Regulator ( <a href="#">TPS51200</a> )
	PCIe Gen 4 Clock Generator ( <a href="#">PI6CG184Q2</a> )
	USB 2.0 7-Port High Speed Hub Controller ( <a href="#">USB2517I</a> )
	Hi-Speed USB Transceiver ( <a href="#">USB3315C</a> )
	ARM-based Cortex-M0 32-bit MCU ( <a href="#">STM32F048G6U6</a> )
<b>Interfaces</b>	4x PCIe
	2x UART
	2x SPI + BOOTSPI
	2x SATA
	7x USB 2.0
	2x Gigabit Ethernet (PHY)
	1x 10 Gigabit Ethernet
	2x I2C
	7x GPIO
<b>Power supply voltage</b>	+5V
<b>Power consumption</b>	<b>TBD</b>
<b>Dimensions</b>	70 x 40 mm

# Block Diagram

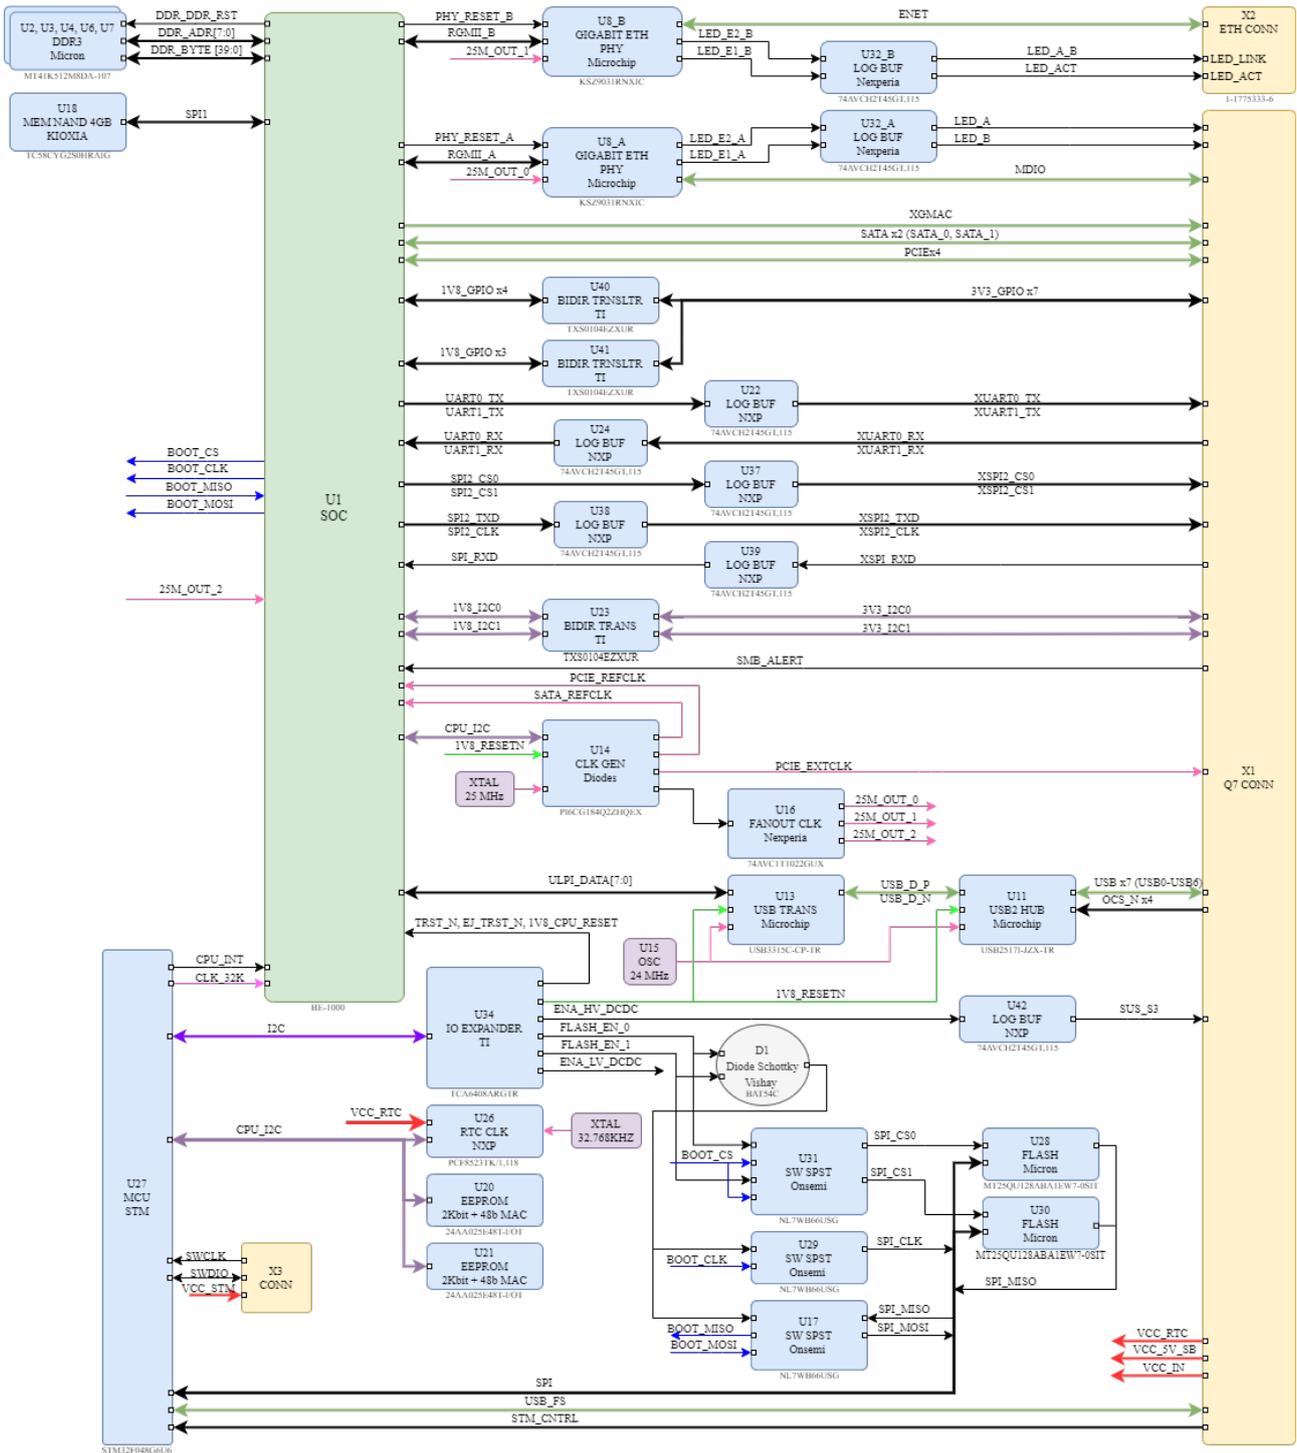


Рисунок 1: Block Diagram

# Power tree

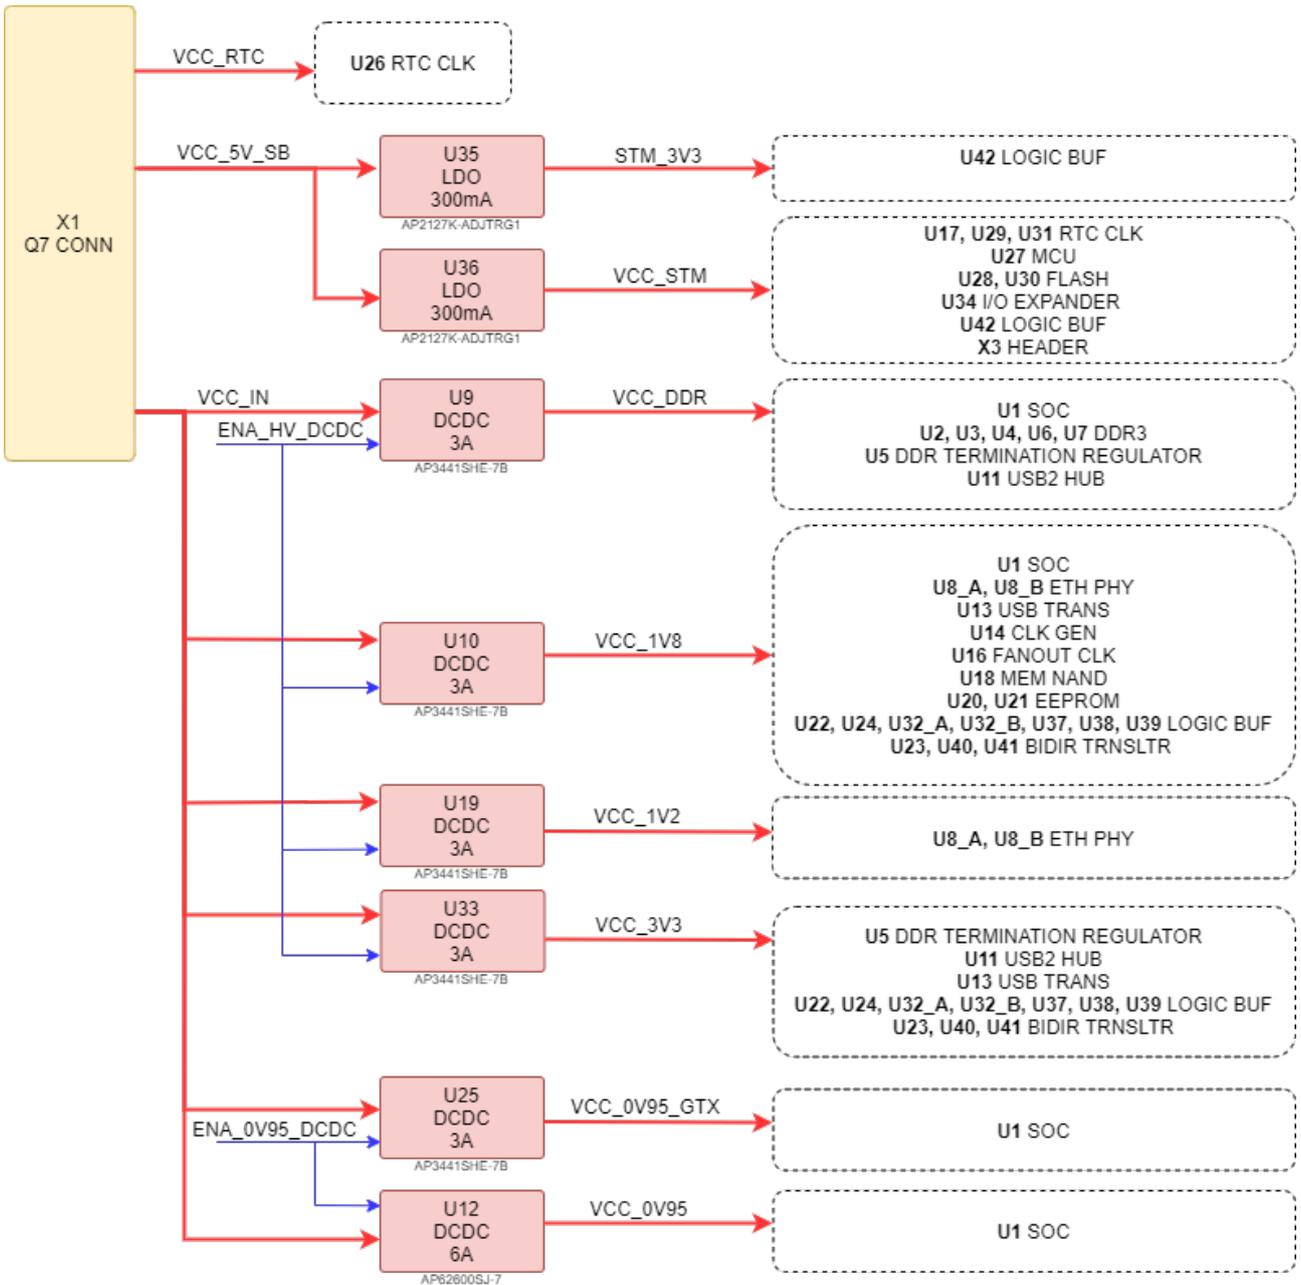


Рисунок 2: Power tree

## Mechanical Specifications

Board dimensions are: 70 x 40 mm.

Printed circuit of the board is made of 10 layers, some of them are ground planes, for disturbance rejection.

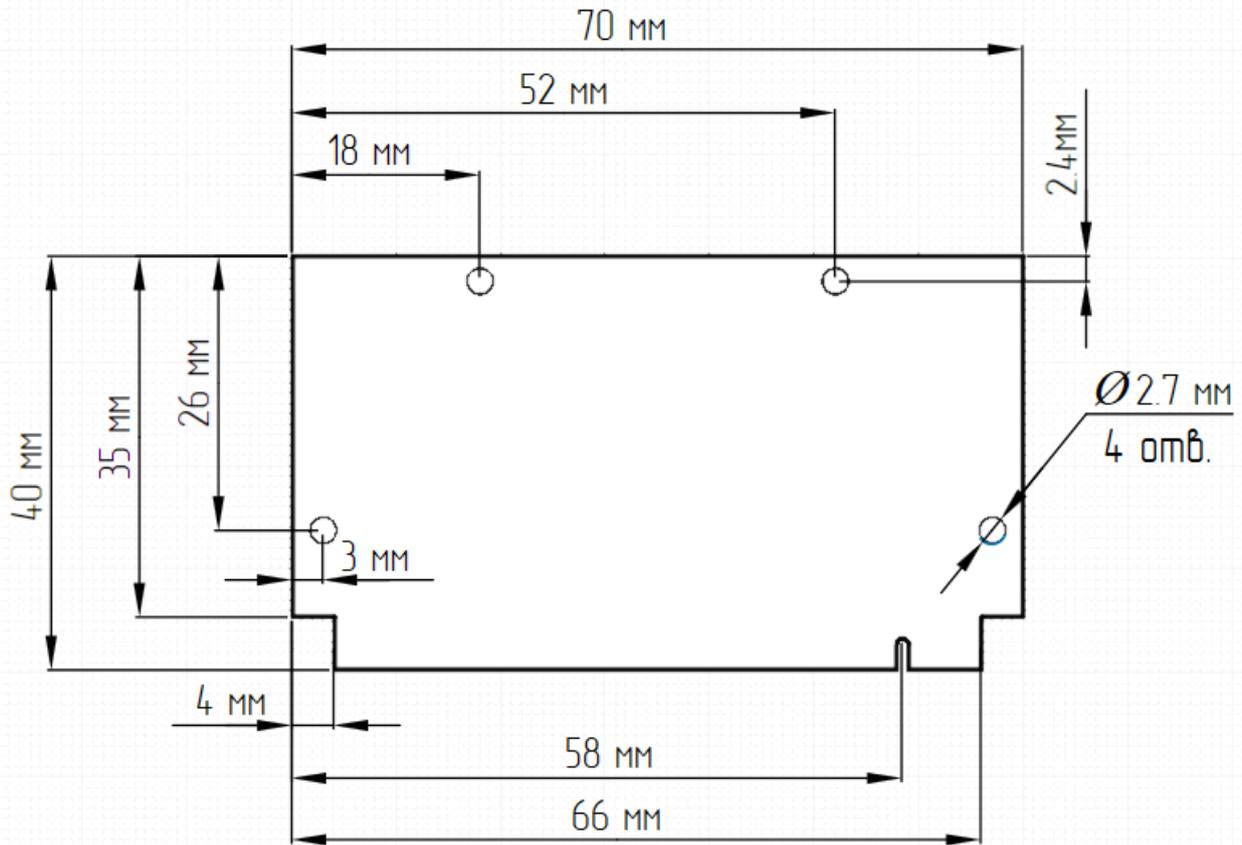


Рисунок 3: Module mechanical dimensions

# Main Hardware Components

## Component Location

### Top view

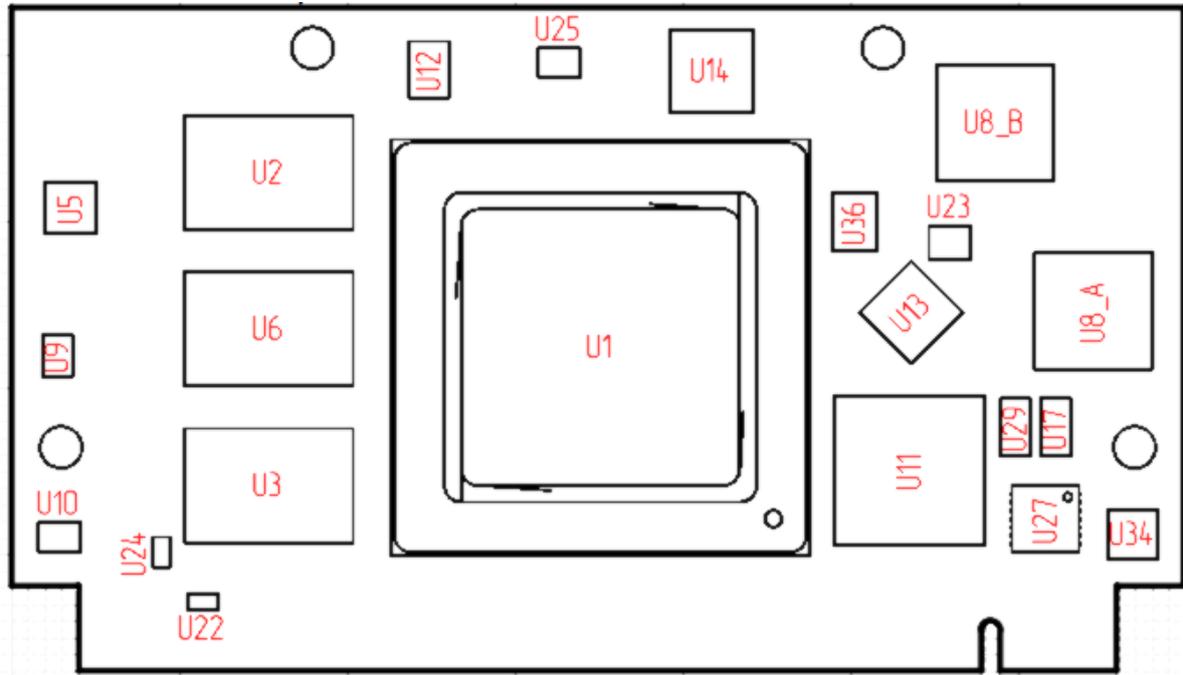


Рисунок 4: Component Location. Top View

Таблица 2: Component description on the board (Top side)

Designator	P/N	Description
U1	BAIKAL-T1	CPU
U2, U3, U6	MT41K512M8DA-107	DDR3 RAM
U5	TPS51200DRCT	DDR Termination Regulator
U8_A, U8_B	KSZ9031RN	Ethernet PHY
U9, U10, U25	AP3441SHE-7B	Step-down DC-DC Converters 3A
U11	USB2517I-JZX-TR	7-Port USB 2.0 Hub Controller
U12	AP62600SJ-7	6A DC-DC Switching Synchronous Buck Regulator
U13	USB3315C-CP-TR	USB-Transceiver
U14	PI6CG184Q2ZHQEX	PCIe Gen 4 Clock Generator
U17, U29	NL7WB66USG	SPST Analogue Switch
U22, U24	74AVCH2T45GT,115	Dual-bit, dual-supply voltage level translator/transceiver
U23	TXS0104EZXUR	4Bit Bidirectional Voltage-Level Shifter
U27	STM32F048G6U6	MCU
U34	TCA6408ARGTR	8-Bit I2C and SMBus I/O Expander
U36	AP2127K-ADJTRG1	CMOS LDO REGULATOR

**Bottom View**

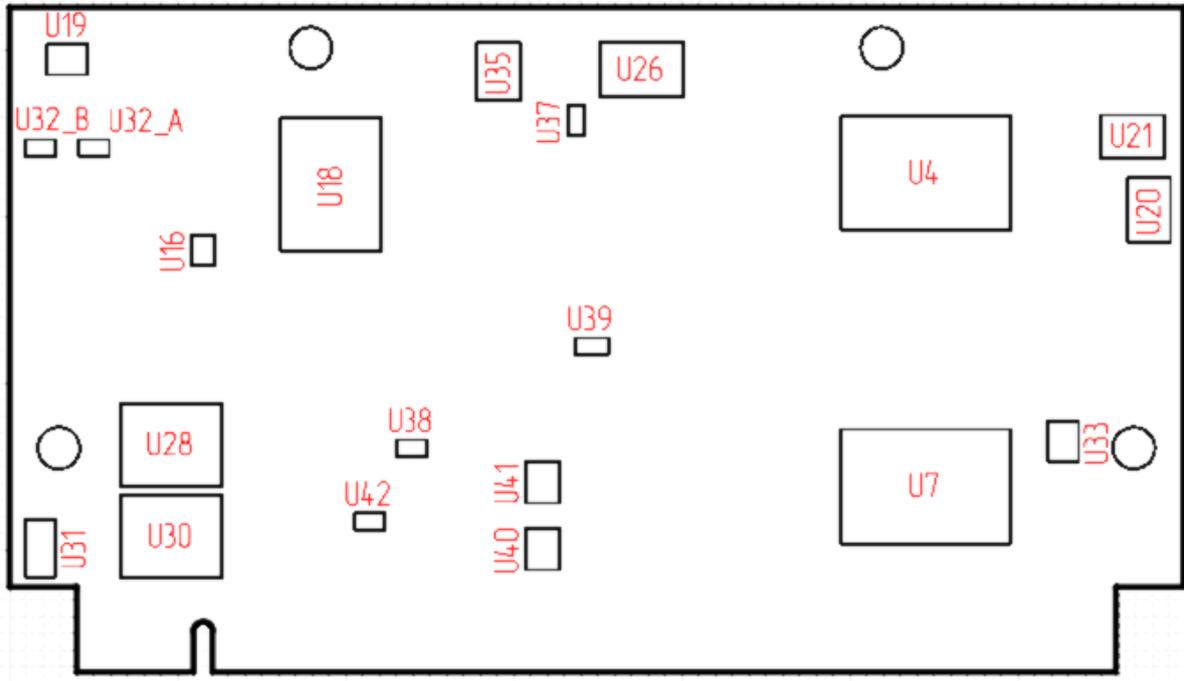


Рисунок 5: Component Location. Bottom View

Таблица 3: Component description on the board (Bottom side)

Designator	P/N	Description
U4, U7	MT41K512M8DA-107	DDR3 RAM
U16	74AVC1T1022GUX	1-to-4 fan-out buffer
U18	TC58CYG2S0HRAIG	NAND Flash memory
U19, U33	AP3441SHE-7B	Step-down DC-DC Converters 3A
U20, U21	24AA025E48T-I/OT	EEPROM
U26	PCF8523TK/1,118	RTC
U28, U30	MT25QU128ABA1EW7-0SIT	FLASH memory with SPI interface
U31	NL7WB66USG	SPST Analogue Switch
U32_A, U32_B, U37, U38, U39, U42	74AVCH2T45GT,115	Dual-bit, dual-supply voltage level translator/transceiver
U35	AP2127K-ADJTRG1	CMOS LDO REGULATOR
U40, U41	TXS0104EZXR	4Bit Bidirectional Voltage-Level Shifter

## Processor

Figure 6 shows the functional modules in the Baikal-T1 processor system.

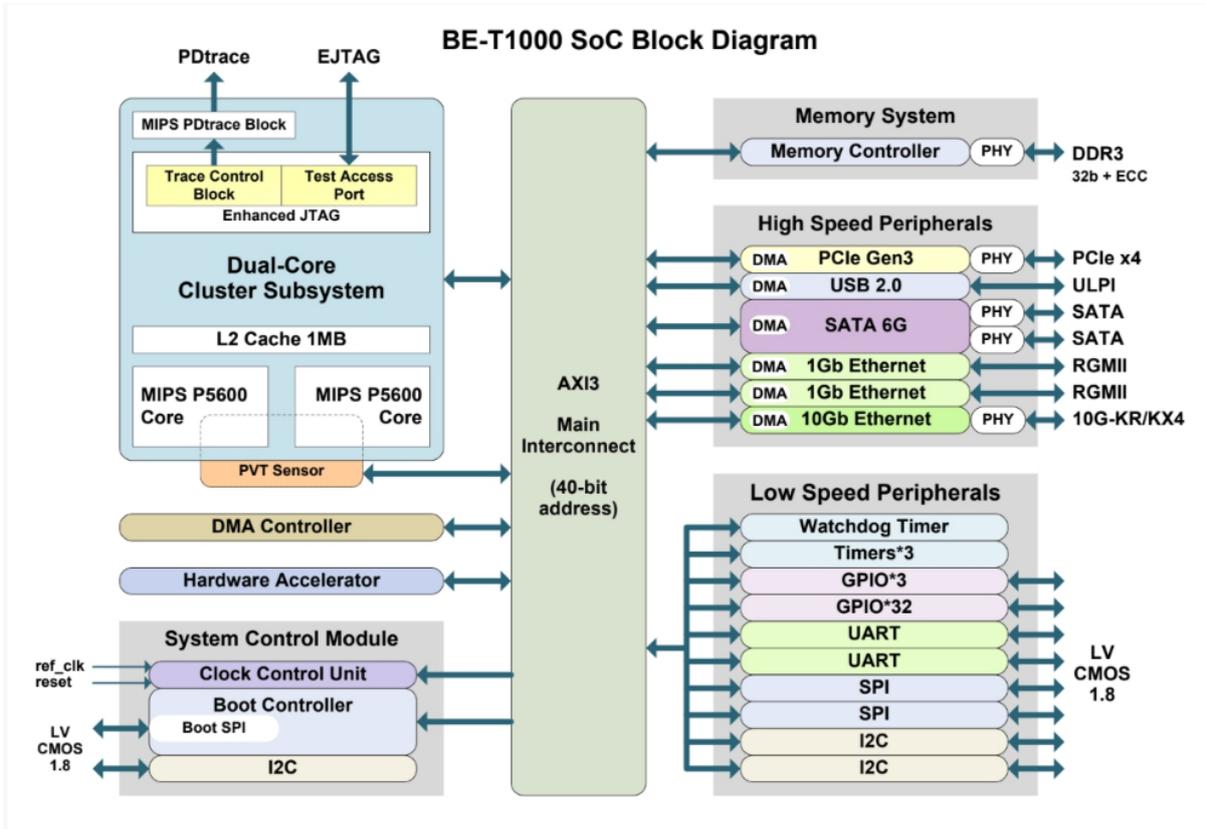


Рисунок 6: Baikal-T1 function modules

# External connectors

## I2C

Two I2C interfaces are available on Q7\_BFK.

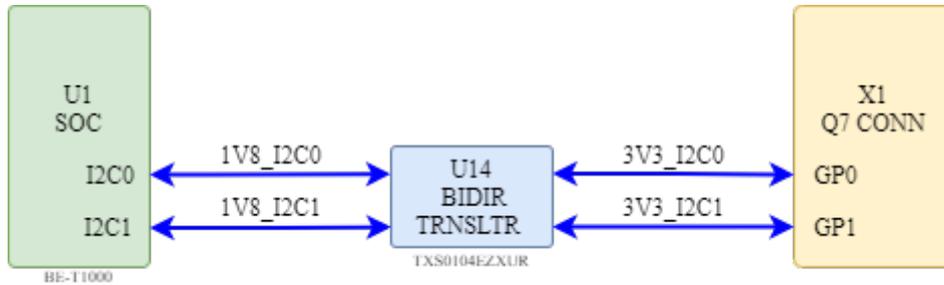


Рисунок 7: I2C interfaces

Таблица 4: Q7 I2C signals

Signal Name	Pin(s)	Direction	Voltage standard	Description	
I2C0_SCL	66	in/out	3.3 1.8	General purpose I2C Bus clock line.	U1.AD5
I2C0_SDA	68	in/out	3.3 1.8	General purpose I2C Bus data line.	U1.AD4
I2C1_SCL	60	in/out	3.3 1.8	General purpose I2C Bus clock line.	U1.K7
I2C1_SDA	62	in/out	3.3 1.8	General purpose I2C Bus data line.	U1.K6

# Debugging/development interfaces

## I2C

One I2C interface (for communication between processor and peripherals) is available on Q7\_BFK.

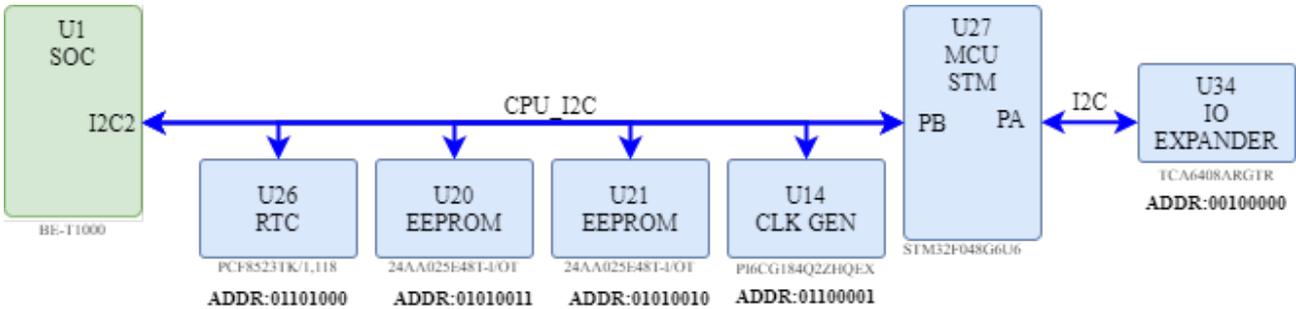


Рисунок 8: I2C interface

Таблица 5: I2C Address Mapping

Device	Address
RTC	0x1101000
EEPROM1	0x1010011
EEPROM2	0x1010010
8-Bit I2C and SMBus I/O Expander	0x0100000
PCIe Gen 4 Clock Generator	0x1100001

Таблица 6: BE-T1000 I2C signals

Signal Name	Pin(s)	Direction	Voltage standard	Description	Comments
I2C2_SDA	K1	in/out	1.8 PU 2.2 kΩ	I2C Bus data line	
I2C2_SCL	J1	in/out	1.8 PU 2.2 kΩ	I2C Bus clock line	

where PU - pull-up resistor, PD -pull-down resistor.

Таблица 7: STM32 I2C signals

Signal Name	Pin(s)	Direction	Voltage standard	Description	Comments
I2C_SDA	6	in/out	3.3	I2C Bus data line.	
I2C_SCL	7	in/out	3.3	I2C Bus clock line.	
CPU_I2C_SCL	27	in/out	3.3	I2C Bus data line.	
CPU_I2C_SDA	28	in/out	3.3	I2C Bus clock line	

where PU - pull-up resistor, PD -pull-down resistor.

# RESET

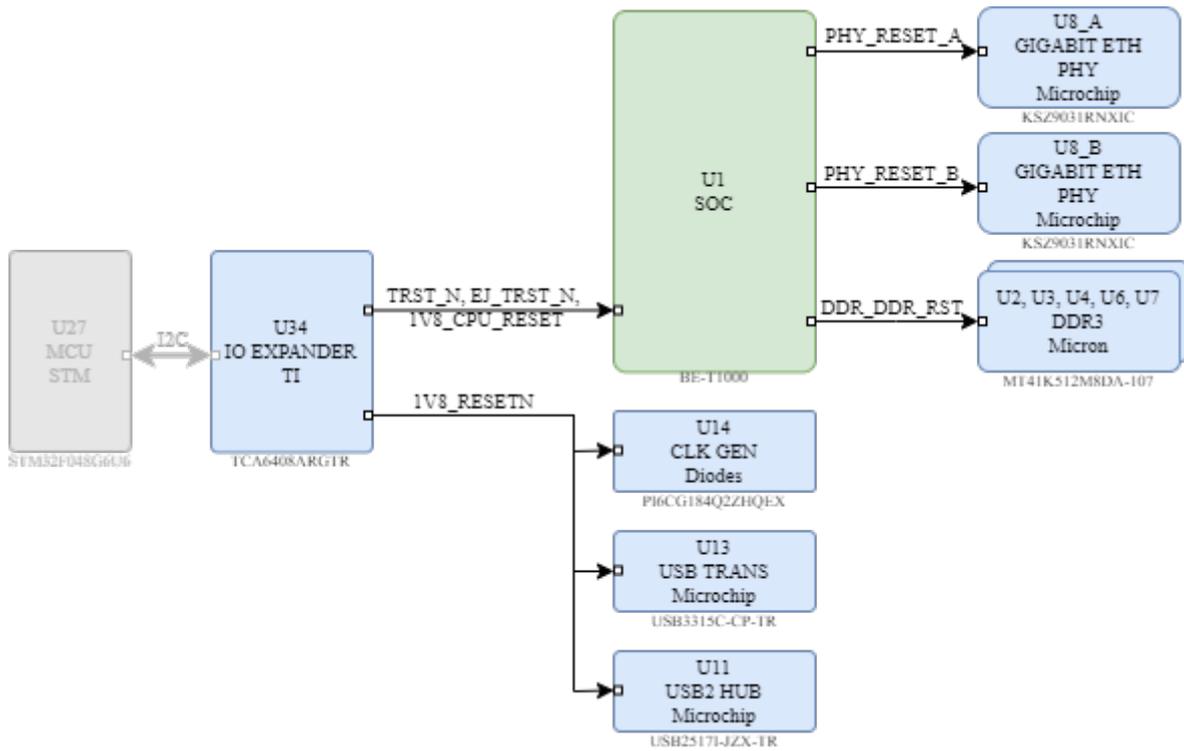


Рисунок 9: Reset signals

Таблица 8: Reset signals

Signal Name	Pin(s)	Voltage standard	Description	Connection	Comments
G0_GP_OUT	N7	1.8 PU 10 kΩ	PHY_RESET_A	U8_A.42	
G1_GP_OUT	Y2	1.8 PU 10 kΩ	PHY_RESET_B	U8_B.42	
GPIO[8]	A5	1.8	CPU_INT	U27.9	
DDR_RAM_RST	T19	1.5 PD 10 kΩ	DDR_DDR_RST	U2.N2, U3.N2, U4.N2, U6.N2, U7.N2,	

where PU - pull-up resistor, PD -pull-down resistor.

# External connectors

## Top view

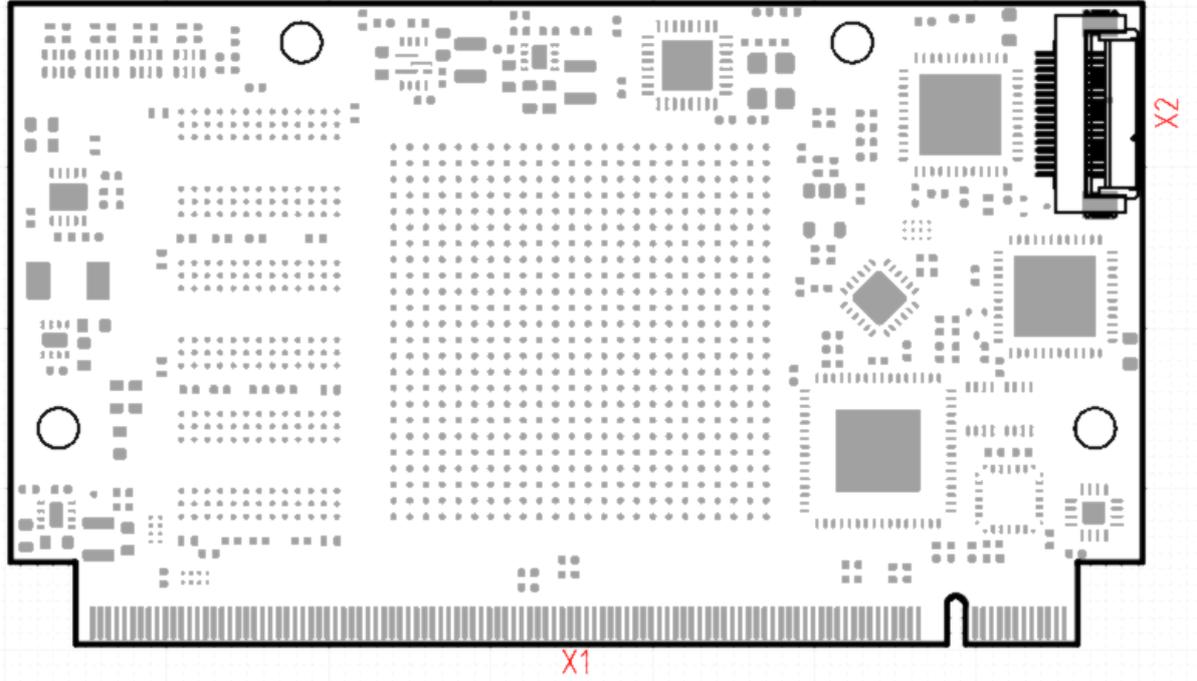


Рисунок 10: Connectors Location. Top View

Designator	P/N	Description
X1	CONN-uQ7-EDGE	uQ7 format connector for connecting to the motherboard
X2	1-1775333-6	Gigabit Ethernet connector ZIF FFC/FPC

**Bottom view**

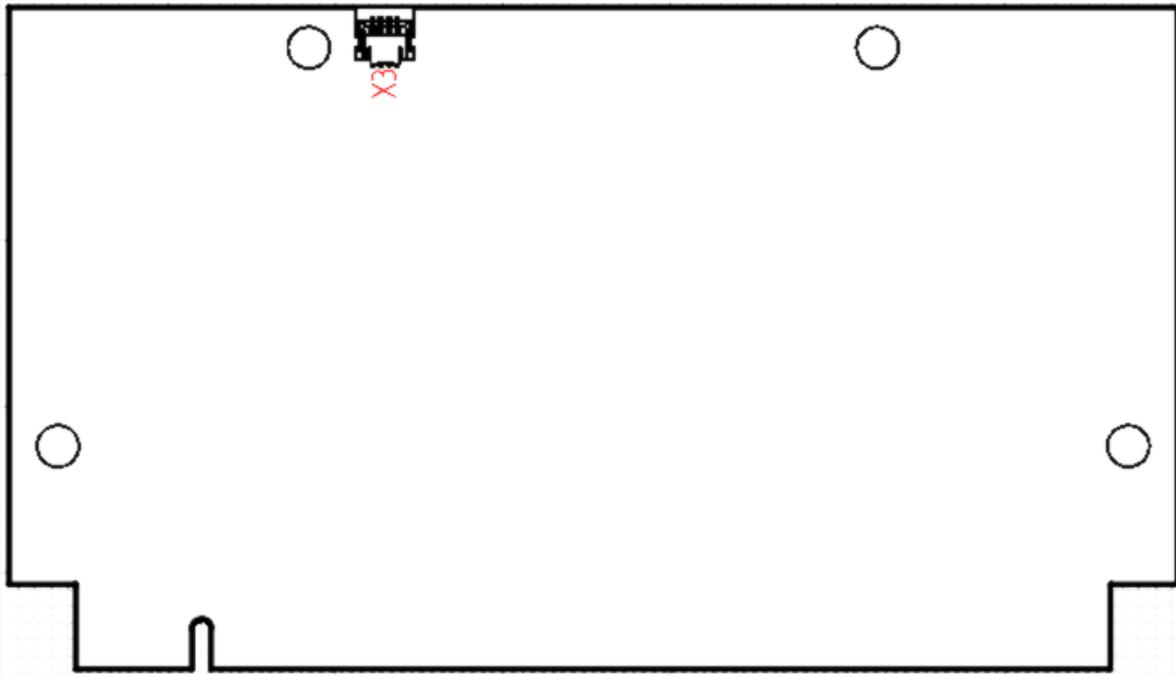


Рисунок 11: Connectors Location. Bottom View

Designator	P/N	Description
X3	59453-041110EHLF	ZIF FFC/FPC connector for debugging/development

# Appendix 1

Таблица 9: X1 Q7\_BFK connectors

Pin	Signal name(Top view)	Signal group	Type	Comments	Pin	Signal name(Bottom view)	Signal group	Type	Comments
1	GND		Power		2	GND		Power	
3	GBE_MDI3-	GBE	in/out		4	GBE_MDI2-	GBE	in/out	
5	GBE_MDI3+	GBE	in/out		6	GBE_MDI2+	GBE	in/out	
7	GBE_LINK100#	GBE	out	Unused	8	GBE_LINK1000#	GBE	out	Unused
9	GBE_MDI1-	GBE	in/out		10	GBE_MDI0-	GBE	in/out	
11	GBE_MDI1+	GBE	in/out		12	GBE_MDI0+	GBE	in/out	
13	GBE_LINK#	GBE	out		14	GBE_ACT#	GBE	out	
15	GBE_CTREF	GBE	out	Unused	16	SUS_S5#	PWR_MGMT	out	Unused
17	WAKE#	PWR_MGMT	in	Unused	18	SUS_S3#	PWR_MGMT	out	
19	GPO0(SUS_STAT#)	PWR_MGMT	out	Unused	20	PWRBTN#	PWR_MGMT	in	
21	SLP_BTN#/GPII1	PWR_MGMT	in	Unused	22	LID_BTN#/GPII0	PWR_MGMT	in	Unused
23	GND		Power		24	GND		Power	
25	GND		Power		26	PWGIN	PWR_MGMT	in	
27	BATLOW#/GPII2	PWR_MGMT	in	Unused	28	RSTBTN#	PWR_MGMT	in	
29	SATA0_TX+	SATA	out		30	SATA1_TX+	SATA	out	
31	SATA0_TX-	SATA	out		32	SATA1_TX-	SATA	out	
33	SATA_ACT#	SATA	out	Unused	34	GND		Power	
35	SATA0_RX+	SATA	in		36	SATA1_RX+	SATA	in	
37	SATA0_RX-	SATA	in		38	SATA1_RX-	SATA	in	
39	GND		Power		40	GND		Power	
41	BIOS_DIS#/BOOT_ALT#	BOOT	in		42	SDIO_CLK#	SDIO	out	Unused
43	SDIO_CD#	SDIO	in/out	Unused	44	reserved (SDIO_LED)			Unused
45	SDIO_CMD	SDIO	in/out	Unused	46	SDIO_WP	SDIO	in/out	Unused
47	SDIO_PWR#	SDIO	out	Unused	48	SDIO_DAT1	SDIO	in/out	Unused
49	SDIO_DAT0	SDIO	in/out	Unused	50	SDIO_DAT3	SDIO	in/out	Unused
51	SDIO_DAT2	SDIO	in/out	Unused	52	reserved (SDIO_DAT5)			Unused
53	reserved (SDIO_DAT4)				54	reserved (SDIO_DAT7)			Unused
55	reserved (SDIO_DAT6)				56	USB_OTG_PEN (RSVD)	USB	out	Unused
57	GND		Power		58	GND		Power	
59	HDA_SYNC/I2S_WS	AUDIO	out	Unused	60	SMB_CLK/GP1_I2C_CLK	MISC	in/out	
61	HDA_RST#/I2S_RST#	AUDIO	out	Unused	62	SMB_DAT/GP1_I2C_DAT	MISC	in/out	
63	HDA_BITCLK/I2S_CLK	AUDIO	out	Unused	64	SMB_ALERT#	MISC	in/out	
65	HDA_SDI/I2S_SDI	AUDIO	in	Unused	66	GP0_I2C_CLK (I2C_CLK)	MISC	in/out	
67	HDA_SDO/I2S_SDO	AUDIO	out	Unused	68	GP0_I2C_DAT (I2C_DAT)	MISC	in/out	
69	THRM#	MISC	in	Unused	70	WDTRIG#	MISC	in	Unused
71	THRMTRIP#	MISC	out	Unused	72	WDOUT	MISC	out	Unused
73	GND		Power		74	GND		Power	
75	USB_P7-/USB_SSTX0-	USB	in/out		76	USB_P6-/USB_SSRX0-	USB	in/out	
77	USB_P7+/USB_SSTX0+	USB	in/out		78	USB_P6+/USB_SSRX0+	USB	in/out	
79	USB_6_7_OC#	USB	in		80	USB_4_5_OC#	USB	in	
81	USB_P5-/USB_SSTX2-	USB	in/out		82	USB_P4-/USB_SSRX2-	USB	in/out	
83	USB_P5+/USB_SSTX2+	USB	in/out		84	USB_P4+/USB_SSRX2+	USB	in/out	
85	USB_2_3_OC#	USB	in		86	USB_0_1_OC#	USB	in	
87	USB_P3-	USB	in/out		88	USB_P2-	USB	in/out	
89	USB_P3+	USB	in/out		90	USB_P2+	USB	in/out	
91	USB_VBUS (USB_CC)	USB	in		92	USB_ID	USB	out	Unused
93	USB_P1-	USB	in/out		94	USB_P0-	USB	in/out	
95	USB_P1+	USB	in/out		96	USB_P0+	USB	in/out	
97	GND		Power		98	GND		Power	
99	eDP0_TX0+/LVDS_A0+	LVDS/eDP	out	Unused	100	eDP1_TX0+/LVDS_B0+	LVDS/eDP	out	
101	eDP0_TX0-/LVDS_A0-	LVDS/eDP	out	Unused	102	eDP1_TX0-/LVDS_B0-	LVDS/eDP	out	
103	eDP0_TX1+/LVDS_A1+	LVDS/eDP	out	Unused	104	eDP1_TX1+/LVDS_B1+	LVDS/eDP	out	
105	eDP0_TX1-/LVDS_A1-	LVDS/eDP	out	Unused	106	eDP1_TX1-/LVDS_B1-	LVDS/eDP	out	
107	eDP0_TX2+/LVDS_A2+	LVDS/eDP	out	Unused	108	eDP1_TX2+/LVDS_B2+	LVDS/eDP	out	
109	eDP0_TX2-/LVDS_A2-	LVDS/eDP	out	Unused	110	eDP1_TX2-/LVDS_B2-	LVDS/eDP	out	
111	LVDS_PPEN	LVDS/eDP	out	Unused	112	LVDS_BLEN	LVDS/eDP	out	Unused

Pin	Signal name(Top view)	Signal group	Type	Comments	Pin	Signal name(Bottom view)	Signal group	Type	Comments
113	eDP0_TX3+/LVDS_A3+	LVDS/eDP	out	Unused	114	eDP1_TX3+/LVDS_B3+	LVDS/eDP	out	Unused
115	eDP0_TX3-/LVDS_A3-	LVDS/eDP	out	Unused	116	eDP1_TX3-/LVDS_B3-	LVDS/eDP	out	Unused
117	GND		Power		118	GND		Power	
119	eDP0_AUX+/LVDS_A_CLK+	LVDS/eDP	out	Unused	120	eDP1_AUX+/LVDS_B_CLK+	LVDS/eDP	in/out	Unused
121	eDP0_AUX-/LVDS_A_CLK-	LVDS/eDP	out	Unused	122	eDP1_AUX-/LVDS_B_CLK-	LVDS/eDP	in/out	Unused
123	LVDS_BLT_CTRL/GP_PWM_OUT0	LVDS/GP	out	Unused	124	GP_1-Wire_Bus/HDMI_CEC (RSVD)	HDMI/DP	in/out	Unused
125	LVDS_DID_DAT/GP_I2C_DAT	LVDS/GP	in/out	Unused	126	eDP0_HPD#/LVDS_BLC_DAT	LVDS/eDP	in/out	Unused
127	LVDS_DID_CLK/GP_I2C_CLK	LVDS/GP	in/out	Unused	128	eDP1_HPD#/LVDS_BLC_CLK	LVDS/eDP	in/out	Unused
129	CAN0_TX	CAN	out	Unused	130	CAN0_RX	CAN	in	Unused
131	DP_LANE3+/TMDS_CLK+ (SDVO_BCLK+)	HDMI/DP	out	Unused	132	USB_SSTX1- (SDVO_INT+)	USB	out	Unused
133	DP_LANE3-/TMDS_CLK- (SDVO_BCLK-)	HDMI/DP	out	Unused	134	USB_SSTX1+ (SDVO_INT-)	USB	out	Unused
135	GND		Power		136	GND		Power	
137	DP_LANE1+/TMDS_LANE1+ (SDVO_GREEN+)	HDMI/DP	out	Unused	138	DP_AUX+ (SDVO_FLDSTALL+)	DP	in/out	Unused
139	DP_LANE1-/TMDS_LANE1- (SDVO_GREEN-)	HDMI/DP	out	Unused	140	DP_AUX- (SDVO_FLDSTALL-)	DP	in/out	Unused
141	GND		Power		142	GND		Power	
143	DP_LANE2+/TMDS_LANE0+ (SDVO_BLUE+)	HDMI/DP	out	Unused	144	USB_SSRX1- (SDVO_TVCLKIN+)	USB	in	Unused
145	DP_LANE2-/TMDS_LANE0- (SDVO_BLUE-)	HDMI/DP	out	Unused	146	USB_SSRX1+ (SDVO_TVCLKIN-)	USB	in	Unused
147	GND		Power		148	GND		Power	
149	DP_LANE0+/TMDS_LANE2+ (SDVO_RED+)	HDMI/DP	out	Unused	150	HDMI_CTRL_DAT (SDVO_CTRL_DAT)	HDMI/DP	in/out	Unused
151	DP_LANE0-/TMDS_LANE2- (SDVO_RED-)	HDMI/DP	out	Unused	152	HDMI_CTRL_CLK (SDVO_CTRL_CLK)	HDMI/DP	in/out	Unused
153	HDMI_HPD#	HDMI/DP	in	Unused	154	DP_HPD#	DP	in	Unused
155	PCIE_CLK_REF+	PCIE	out		156	PCIE_WAKE#	PCIE	in	Unused
157	PCIE_CLK_REF-	PCIE	out		158	PCIE_RST#	PCIE	out	Unused
159	GND		Power		160	GND		Power	
161	PCIE3_TX+	PCIE	out		162	PCIE3_RX+	PCIE	in	
163	PCIE3_TX-	PCIE	out		164	PCIE3_RX-	PCIE	in	
165	GND		Power		166	GND		Power	
167	PCIE2_TX+	PCIE	out		168	PCIE2_RX+	PCIE	in	
169	PCIE2_TX-	PCIE	out		170	PCIE2_RX-	PCIE	in	
171	UART0_TX (EXCD0_PERST#)	UART	out		172	UART0_RTS# (EXCD1_PERST#)	UART	out	Unused
173	PCIE1_TX+	PCIE	out		174	PCIE1_RX+	PCIE	in	
175	PCIE1_TX-	PCIE	out		176	PCIE1_RX-	PCIE	in	
177	UART0_RX (EXCD0_CPPE#)	UART	in		178	UART0_CTS# (EXCD1_CPPE#)	UART	in	Unused
179	PCIE0_TX+	PCIE	out		180	PCIE0_RX+	PCIE	in	
181	PCIE0_TX-	PCIE	out		182	PCIE0_RX-	PCIE	in	
183	GND		Power		184	GND		Power	
185	LPC_AD0/GPIO0	GPIO	in/out		186	LPC_AD1/GPIO1	LPC	in/out	
187	LPC_AD2/GPIO2	GPIO	in/out		188	LPC_AD3/GPIO3	LPC	in/out	
189	LPC_CLK/GPIO4	GPIO	in/out		190	LPC_FRAME#/GPIO5	LPC	in/out	
191	SERIRQ/GPIO6	GPIO	in/out		192	LPC_LDRQ#/GPIO7	LPC	in/out	
193	VCC_RTC		in		194	SPKR/GP_PWM_OUT2	MISC	out	Unused
195	FAN_T_IN/GP_TIMER_IN	MISC	in	Unused	196	FAN_OUT/GP_PWM_OUT1	MISC	out	Unused
197	GND		Power		198	GND		Power	
199	SPI_MOSI	SPI	out		200	SPI_CS0#	SPI	out	
201	SPI_MISO	SPI	in		202	SPI_CS1#	SPI	out	
203	SPI_SCK	SPI	out		204	MFG_NC4	MFG	in	Unused
205	VCC_5V_SB		in		206	VCC_5V_SB		in	
207	MFG_NC0	MFG	in	Unused	208	MFG_NC2	MFG	in	
209	MFG_NC1	MFG	out		210	MFG_NC3	MFG	in	
211	NC (VCC)			Unused	212	NC (VCC)			Unused
213	NC (VCC)			Unused	214	NC (VCC)			Unused

Pin	Signal name(Top view)	Signal group	Type	Comments	Pin	Signal name(Bottom view)	Signal group	Type	Comments
215	NC (VCC)			Unused	216	NC (VCC)			Unused
217	NC (VCC)			Unused	218	NC (VCC)			Unused
219	VCC		Power		220	VCC		Power	
221	VCC		Power		222	VCC		Power	
223	VCC		Power		224	VCC		Power	
225	VCC		Power		226	VCC		Power	
227	VCC		Power		228	VCC		Power	
229	VCC		Power		230	VCC		Power	